

ABOUT SKYLINK



Since the establishment of the brand, SKYLINK, as a world-renowned diaphragm pump manufacturer, has been focussing on fluid transportation and providing solutions for users in various industries around the world.

Our main products include **pneumatic diaphragm pumps, electric diaphragm pumps, sewage pumps, high-pressure pumps, powder pumps and sanitary pumps**. Our core markets include lithium batteries, environmental protection water treatment, pharmaceuticals, chemicals, coatings, mineral smelting, electronics and other industrial application markets.

As an experienced industrial pump manufacturer, SKYLINK diaphragm pump series products can transport not only ordinary fluid media, but also corrosive media, high-wear media, high-viscosity media and powder particle media. SKYLINK can provide reasonable and efficient fluid conveying solutions according to applications and customer needs.

Each equipment manufactured by SKYLINK has undergone strict testing and quality inspection before leaving the factory, and has passed 3A, CE, FDA, ISO9001 and other certifications.

For more information, please visit the company's website:
<http://www.skylink-tec.com/>

In view of the continuous progress, the appearance, colour and specifications of the product will be changed in the future without further notice.

Service hotline
400 8919 365



Skylink Fluid Technology Co., Ltd
438 Jinyuan 8 Road, Jiading District, Shanghai, China

Shanghai	Guangzhou
Tel. (21) 6243 3309	Tel. (20) 8552 9895
Wuxi	Chongqing
Tel. (510) 8284 4828	Tel. 189 1775 5891

www.skylink-tec.com



Specialist in fluid transfer

SKYLINK Diaphragm Pump

SK/PS-SERIES

Air-Opeated Double Diaphragm Pump


Conveying fluids containing solids and the organic solvents
Conveying acid and alkali corrosive fluid

Product Parameters

Max Pressure	8.6Bar
Flow Range	3-60m³/H
Solid Particles	2.4-12mm

Product Features

- Unbalanced air valve, no dead point, low air consumption
- Multiple material options: AL/CI/316L/PP/PVDF/PPH
- Anti-freezing, fast exhaust
- Designed with reinforcing ribs, it is resistant to wear, and has high strength
- Conductive, anti-static pump body

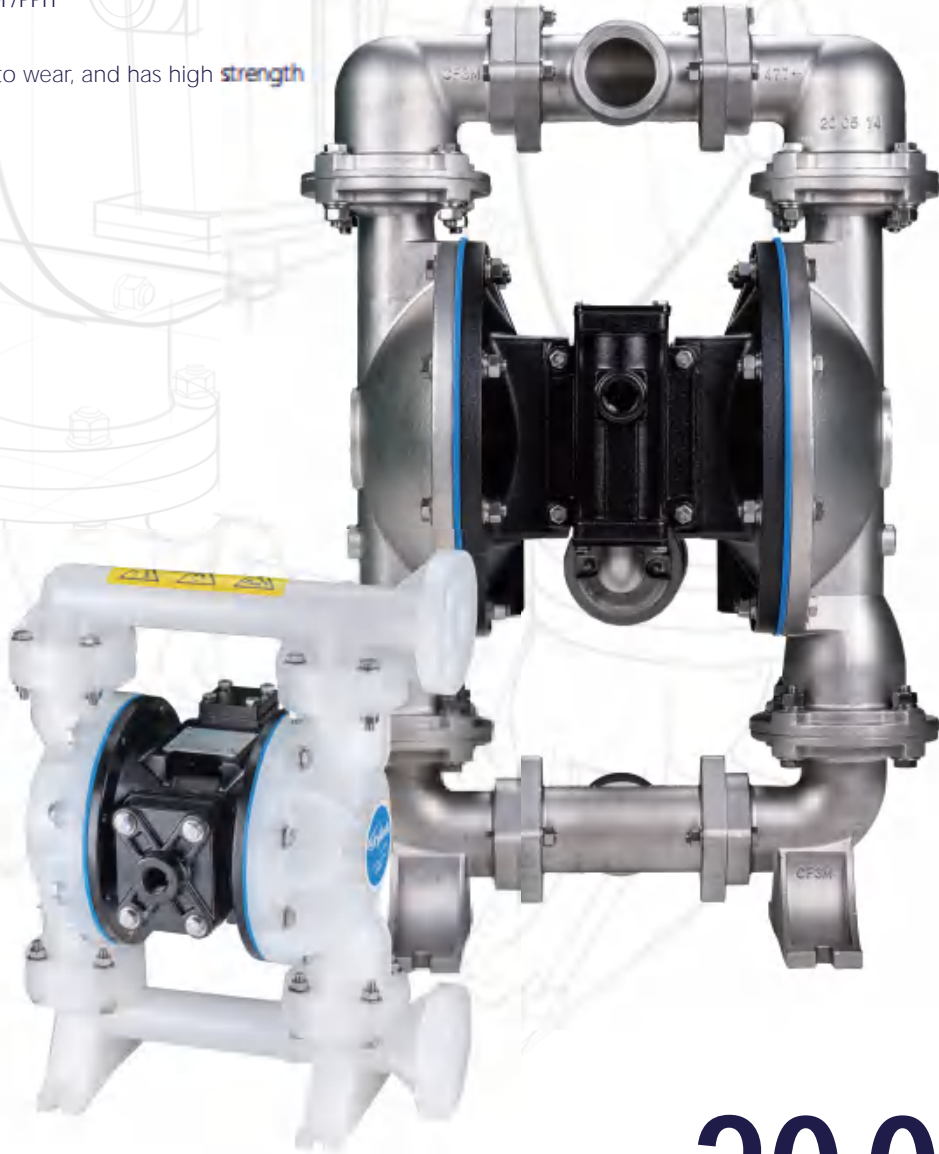

diaphragm service life up to 20,000,000 times

E-SERIES

Electric Double Diaphragm Pump


Safe Stable Low-noise Energy-conservation

Product Parameters

Max Pressure	5Bar
Flow Range	1.38-32m³/H
Solid Particles	6-12mm

Product Features

- Designed with back pressure protection,extend the service life of the diaphragm
- No motive seal, no leakage and dry rotation failure of pump
- Stable flow output, low pulse, stable running
- Motor-driven, lower noise
- High energy efficiency, energy-saving up to 75%

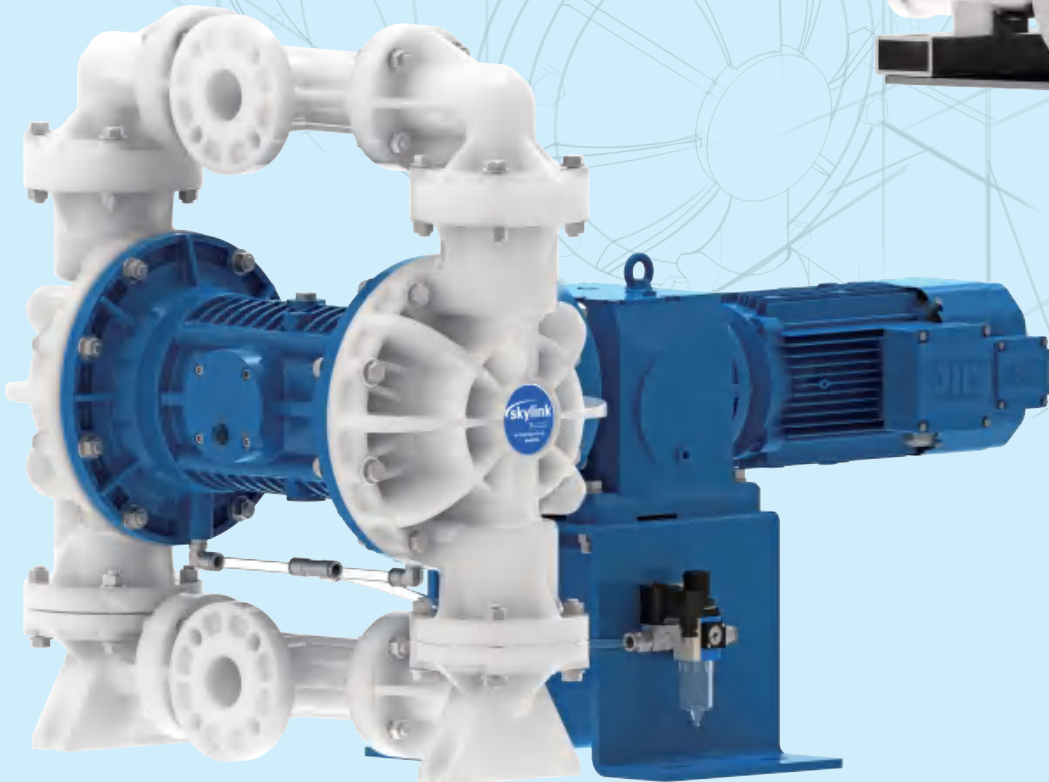

H-SERIES

Metering Pump

Application of chemical accurate dosing

Product Parameters

Flow Range	6.5-3000L/h
pressure Range	3-50Bar
Steady-state accuracy	±1%



SF/F

Hygienic Pump/FDA Pump

Suitable for food-grade/hygienic-grade fluid conveying

Product Parameters

Max Pressure	8.6Bar
Flow Range	9-60m³/H
Solid Particles	5-15mm



PDSK

Powder Transfer Pump

Conveying powder particles



HL/HF

Rotary Lobe Pump

Transport high-viscosity fluids



Lobeflo

G-SERIES

Micro Magnetically Gear Pump

No pulsation - the ideal choice for measurement applications



Meterflo